
OFFICE OF THE MARION COUNTY SURVEYOR SECTION RECORD CORNER

SECTION \_\_\_\_\_24\_\_TOWNSHIP DATE: \_\_\_\_\_\_9-13-07 Wilcoxen PARTY CHIEF: \_


CREW: TYPE OF MARKER: Steel Pin Fd

METHOD OF ESTABLISHMENT: \_\_\_\_County:

IN. S.P.C. E ZONE NAD '83 NAME: 16022402 N: 508110.7060(m) E: 49129.7670(m)



W-bound 38th Street

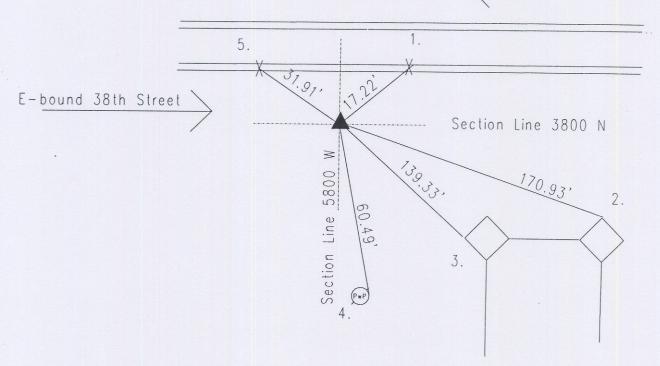

16022402

REF.	DISTANCE	DESCRIPTION
1.	17.22'	Cut 'x' in curb
2.	170.93	NE corner of 'Steak & Shake'
3.	139.33'	NW corner "
4.	60.49'	Small PK nail E PwP#292-395 B 10"up
5.	31.91'	Cut 'x' in curb

Originally set as a post by John Hendricks in 1820 with the following witnesses: 12" beech bearing south 83degrees, thence west 19 links; and a 22" white oak bearing south 62 degrees, thence east 13 links. (M.C. Atlas p. 11)A survey by Percy Hasbrook on July 21, 1849 indicates a found large rock and both witness trees green. (Warren Legal Book p.3) A survey by O.W. Voorhies on May 1, 1872 indicates a found rock. (Warren Legal Book p. 3) Corner referenced by MCS in 1960 and called a stone 3" down. Corner referenced by MCS in 1970 and called a stone. Corner referenced by Fortner on 2/19/75 and called a boat spike 4" down. Corner referenced by Wade on 6/2/86 and called a brass plug. Corner referenced by Greene on 12/3/87 and called a brass plug. Corner referenced by Wilcoxen on 4/18/98 and called a brass plug. Corner excavated by Wilcoxen on 12/12/01 and a #205cast iron Harrison monument was set in position by GPS coordinates.